



concrete / cemento


white / bianco RAL 9010

black / nero RAL 9005

ALULED bar zero collection

design L4B

AP 200



[En] → Lighting fixture in carved solid aluminium, powder-coated available in 2 colors and concrete finish. White PMMA diffuser. LED 220-240V. Not-adjustable version as wall lamp. Frame in powder-coated aluminium, available in 2 colors.

[It] → Corpo illuminante in alluminio ricavato dal pieno verniciato a polveri nei 2 colori disponibili e finitura cemento. Diffusore in PMMA bianco. Sorgente LED 220-240V. Versione fissa solo parete. Montatura in alluminio verniciato a polveri nei 2 colori disponibili.

material

aluminium
alluminio

light source


LED 220-240V
120V for
NORTH AMERICA

Dimmer not included
Dimmer non incluso



equipment

AP 200
13.5W LED 3000°K lm1450


symbols



photometric test BAR

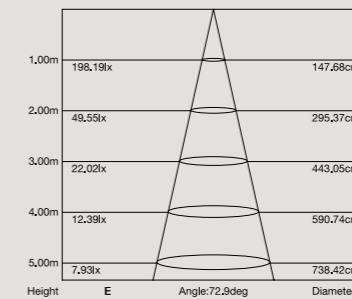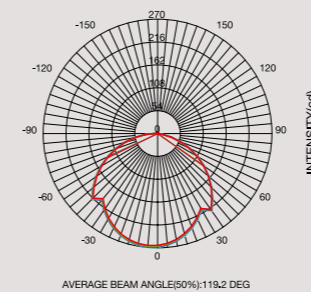




energy label



label A

[En] → Lighting fixture in carved solid aluminium, powder-coated available in 2 colors and concrete finish. White PMMA diffuser. LED 220-240V. 359° adjustable version as wall/ceiling lamp. Frame in powder-coated aluminium, available in 2 colors. Chromed metal joint.

[It] → Corpo illuminante in alluminio ricavato dal pieno verniciato a polveri nei 2 colori disponibili e finitura cemento. Diffusore in PMMA bianco. Sorgente LED 220-240V. Versione orientabile 359° parete e plafoniera. Montatura in alluminio verniciato a polveri nei 2 colori disponibili. Snodo metallo cromato.

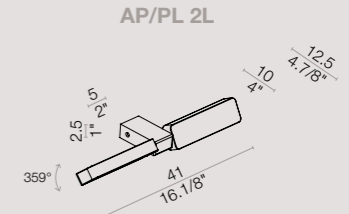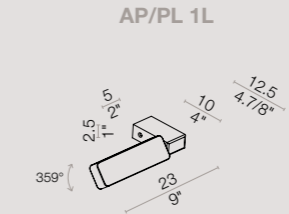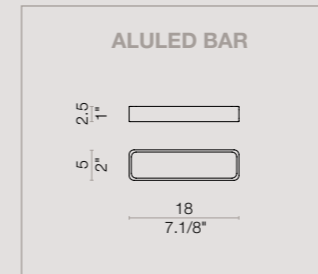

colors



white / bianco
RAL 9010



black / nero
RAL 9005



concrete / cemento

material

aluminium
alluminio

light source

LED 220-240V

120V for
NORTH AMERICA

Dimmer not included
Dimmer non incluso

equipment


AP/PL 1L
13.5W LED 3000°K lm1450

AP/PL 2L
27W LED 3000°K lm2900

symbols



photometric test BAR

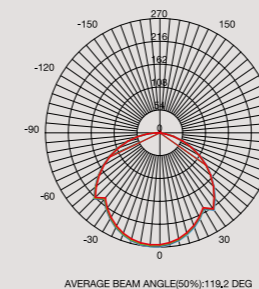

Height	E	Angle: 72.9deg	Diameter
1.00m	198,19lx		147,68cm
2.00m	49,55lx		295,37cm
3.00m	22,02lx		443,05cm
4.00m	12,39lx		590,74cm
5.00m	7,93lx		738,42cm



energy label



label A

[En] → Lighting fixture in carved solid aluminium, powder-coated available in 2 colors and concrete finish. White PMMA diffuser. LED 220-240V. 359° adjustable version as wall/ceiling lamp. Frame in powder-coated aluminium, available in 2 colors. Chromed metal joint.

[It] → Corpo illuminante in alluminio ricavato dal pieno verniciato a polveri nei 2 colori disponibili e finitura cemento. Diffusore in PMMA bianco. Sorgente LED 220-240V. Versione orientabile 359° parete e plafoniera. Montatura in alluminio verniciato a polveri nei 2 colori disponibili. Snodo metallo cromato.

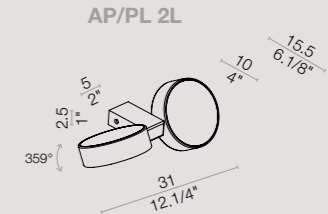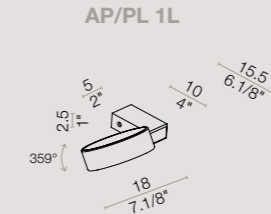

material

aluminium
alluminio


light source

LED 220-240V
120V for
NORTH AMERICA
Dimmer not included
Dimmer non incluso



equipment

AP/PL 1L
10W LED 3000°K 1500 lm
AP/PL 2L
20W LED 3000°K 3000 lm


symbols



photometric test DISC

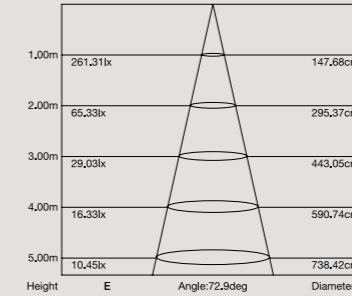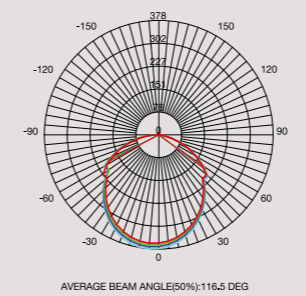

energy label



colors



ALULED square

PL 30 1L
ceiling lamp

dimensions
L 14.5 x H max 35 cm

colors
white 9010 + black 9005

[En] → The precision given by CNC machining, which is used to manufacture both the lighting fixture made from carved solid aluminium and the PMMA diffuser, allow the fixing system of the two parts with no visible mechanical elements.

[It] → La precisione data dalle lavorazioni a controllo numerico, con cui vengono prodotti sia il corpo illuminante ricavato da un pieno in alluminio, sia il diffusore in PMMA, permettono un fissaggio delle due parti, privo di elementi meccanici a vista.






ALULED square collection

design L4B

[En] → Lighting fixture in carved solid aluminium, powder-coated available in 2 colors and concrete finish. White PMMA diffuser. LED 220-240V. 359° adjustable version as wall/ceiling lamp. Frame in powder-coated aluminium, available in 2 colors. Chromed metal joint.

[It] → Corpo illuminante in alluminio ricavato dal pieno verniciato a polveri nei 2 colori disponibili e finitura cemento. Diffusore in PMMA bianco. Sorgente LED 220-240V. Versione orientabile 359° parete e plafoniera. Montatura in alluminio verniciato a polveri nei 2 colori disponibili. Snodo metallo cromato.

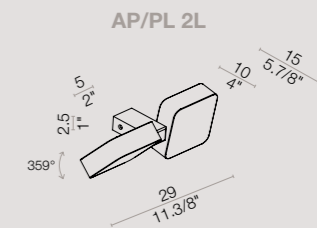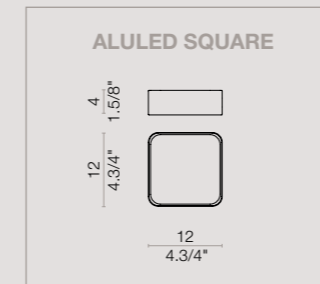

material

aluminium
alluminio

light source

LED 220-240V
120V for
NORTH AMERICA
Dimmer not included
Dimmer non incluso


equipment

AP/PL 1L
10W LED 3000°K 1500 lm
AP/PL 2L
20W LED 3000°K 3000 lm

symbols



photometric test SQUARE

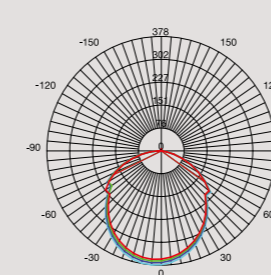

Height	E	Angle: 72,9deg	Diameter
1,00m	261,31lx		147,68cm
2,00m	65,33lx		295,37cm
3,00m	29,03lx		443,05cm
4,00m	16,33lx		590,74cm
5,00m	10,45lx		738,42cm

energy label



label A

colors

